


JIS B 2401 P番 (運動用・円筒面固定用・平面固定用)

DAIKO RUBBER CO., LTD.

【リング寸法】

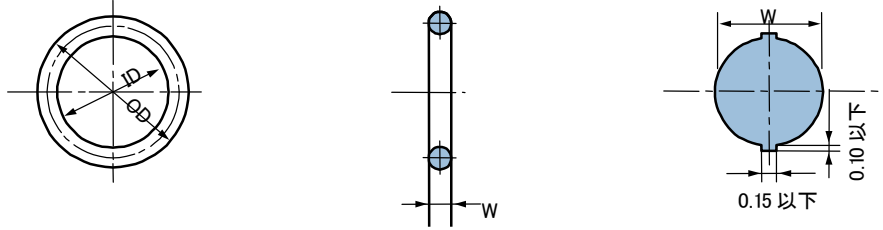

【寸法表】

呼び番号	リングの寸法		呼び番号	リングの寸法		呼び番号	リングの寸法				
	太さ W	内径 ID ※1		太さ W	内径 ID ※1		太さ W	内径 ID ※1			
P3	1.9±0.08	2.8	±0.14	P48A	5.7±0.13	47.6	±0.44	P220	8.4±0.15	219.5	±1.68
P4		3.8		P50A		49.6	±0.45	P225		224.5	±1.71
P5		4.8	±0.15	P52		51.6	±0.47	P230		229.5	±1.75
P6		5.8		P53		52.6	±0.48	P235		234.5	±1.78
P7		6.8		P55		54.6	±0.49	P240		239.5	±1.81
P8		7.8	±0.16	P56		55.6	±0.50	P245		244.5	±1.84
P9		8.8		P58		57.6	±0.52	P250		249.5	±1.88
P10		9.8	±0.17	P60		59.6	±0.53	P255		254.5	±1.91
P10A		9.8		P62		61.6	±0.55	P260		259.5	±1.94
P11		10.8		P63		62.6	±0.56	P265		264.5	±1.97
P11.2	11	±0.18	P65	64.6	±0.57	P270	269.5	±2.01			
P12	11.8		P67	66.6	±0.59	P275	274.5	±2.04			
P12.5	12.3	±0.19	P70	69.6	±0.61	P280	279.5	±2.07			
P14	13.8		P71	70.6	±0.62	P285	284.5	±2.10			
P15	14.8		P75	74.6	±0.65	P290	289.5	±2.14			
P16	15.8	±0.20	P80	79.6	±0.69	P295	294.5	±2.17			
P18	17.8	±0.21	P85	84.6	±0.73	P300	299.5	±2.20			
P20	19.8	±0.22	P90	89.6	±0.77	P315	314.5	±2.30			
P21	20.8	±0.23	P95	94.6	±0.81	P320	319.5	±2.33			
P22	21.8		P100	99.6	±0.84	P335	334.5	±2.42			
P22A	21.7	±0.24	P102	101.6	±0.85	P340	339.5	±2.45			
P22.4	22.1		P105	104.6	±0.87	P355	354.5	±2.54			
P24	23.7		P110	109.6	±0.91	P360	359.5	±2.57			
P25	24.7			P112	111.6	±0.92	P375	374.5	±2.67		
P25.5	25.2	±0.25	P115	114.6	±0.94	P385	384.5	±2.73			
P26	25.7	±0.26	P120	119.6	±0.98	P400	399.5	±2.82			
P28	27.7	±0.28	P125	124.6	±1.01	P405	404.5	±3.00			
P29	28.7		P130	129.6	±1.05	P410	409.5				
P29.5	29.2	±0.29	P132	131.6	±1.06	P415	414.5				
P30	29.7		P135	134.6	±1.09	P420	419.5				
P31	30.7	±0.30	P140	139.6	±1.12	P425	424.5				
P31.5	31.2		P145	144.6	±1.16	P430	429.5				
P32	31.7	±0.31	P150	149.6	±1.19	P435	434.5				
P34	33.7	±0.33	P150A	149.5	±1.19	P440	439.5				
P35	34.7		P155	154.5	±1.23	P445	444.5				
P35.5	35.2	±0.34	P160	159.5	±1.26	P450	449.5				
P36	35.7		P165	164.5	±1.30	P455	454.5				
P38	37.7		P170	169.5	±1.33	P460	459.5				
P39	38.7	±0.37	P175	174.5	±1.37	P465	464.5				
P40	39.7		P180	179.5	±1.40	P470	469.5				
P41	40.7	±0.38	P185	184.5	±1.44	P475	474.5				
P42	41.7	±0.39	P190	189.5	±1.48	P480	479.5				
P44	43.7		P195	194.5	±1.51	P485	484.5				
P45	44.7	±0.41	P200	199.5	±1.55	P490	489.5				
P46	45.7	±0.42	P205	204.5	±1.58	P495	494.5				
P48	47.7	±0.44	P209	208.5	±1.61	P500	499.5				
P49	48.7		P210	209.5	±1.62						
P50	49.7	±0.45	P215	214.5	±1.65						

【適応材料表】

適応材料種類		
JIS記号	ゴム種類	用途
JIS 1種A	ニトリルゴム(NBR)	耐鉱物油用
JIS 1種B	ニトリルゴム(NBR)	耐鉱物油用
JIS 2種	ニトリルゴム(NBR)	耐ガソリン用
JIS 3種	スチレンブタジエンゴム(SBR)	耐動物油用
JIS 4種C	シリコーンゴム(VMQ)	
JIS 4種D	フッ素ゴム(FKM)	耐熱用

その他特殊材料にも対応可能です。詳しくはお問合せください。